

5

4

3

2

1

Compatibility:
Compatible with all Balluff
BTL6 & BTL7 0... 10Vdc
Output Analog Sensors

DCN:
DCN-0431

Change:
Release to Production

Changed:
06/05/2019

RSayoufi

Approved:
08/13/19 J Gamble



Cable Specifications:

- Temperature Range: -20°C ~ 80°C
- Contact Current Rating: 1.5A
- Certification: IP67

Material Specifications:

- Cable Jacket: Black PUR per UL 20549
- Conductor Jacket: PP
- Connector screw or Nut: Zinc alloy with Nickel Plating
- Black terminal Housing
- Connector Terminals: Brass with Gold Plating
- Connector Overmold: Black TPU





Wiring Diagram:

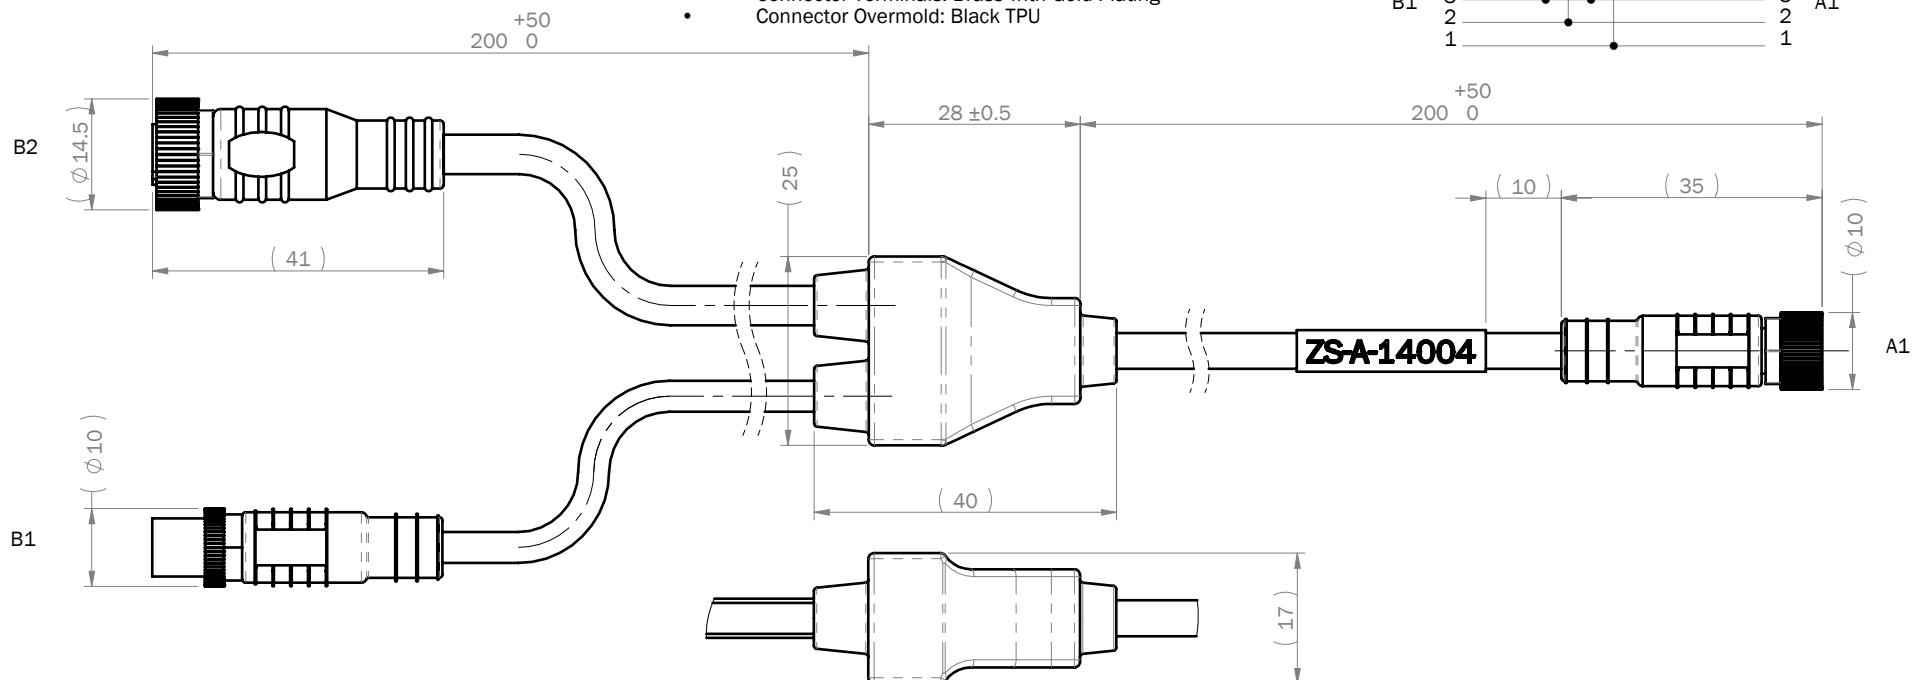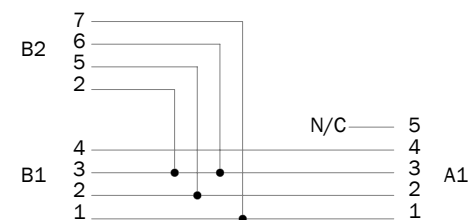

B2
M12-8Pin
Female Contacts

B1
M8-4Pin
Male Contacts

A1
M8-5Pin
Female to S2

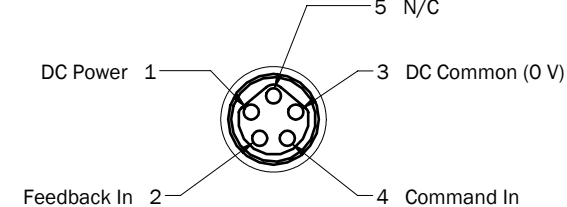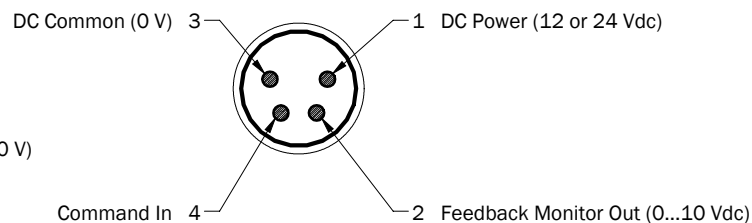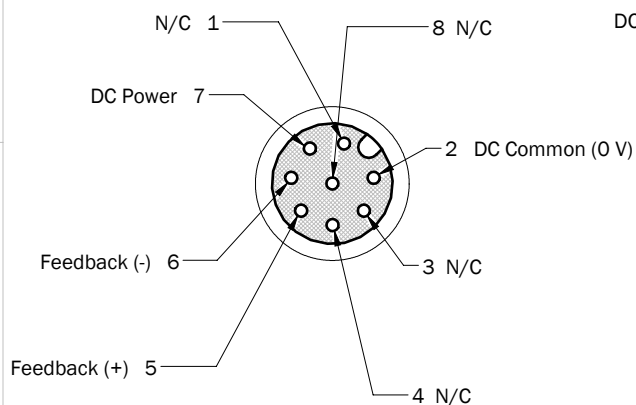

Units: mm
Unless specified otherwise:
Refer to ISO 2768-mK
for tolerances

Break Sharp Edges

Drawing Name:

ZS-A-14004-OUTL
Splitter Cable for Balluff-6 7 Sensors

Material:
See
Material
Specifications

Finish:
None

Drawn: RSayoufi

Date: 06/03/19 Rev: A

Model: V25-S2 Project:

Size: A Scale: 1:1 Sheet 1 of 1

ENFIELD TECHNOLOGIES
35 Nutmeg Drive
Trumbull, CT 06611
(203) 375-3100
www.enfieldtech.com
This information is proprietary to
Enfield Technologies and may be
further protected by trademarks,
copyrights, or patents.

4

3

2

1